

User's Manual for ZKMD4 Series Mini Dome IP Camera

Document Version: 2.2

Date: 2013.06

Introduction

This document mainly introduces the functional features, installation process and access methods of ZKMD4 series IPC.

Important Notices

Thanks for selecting our company's IPC. Before use, please read through the user's guide to avoid any unnecessary damage!

All functions depend on the actual product. Since the product is subject to updating, our company is not responsible for any difference from this guide and not liable for any dispute over different technical parameters from this guide. The project is subject to any change without notice.

To learn more, please visit our company's website www.zkivision.com or local office.

Table of Contents

1 Overview.....	1
1.1 Product Description	1
1.2 Product Features	1
1.3 Technical Parameters	2
1.4 Product Appearance	4
1.5 Connecting Terminal.....	5
1.6 Basic Procedure	6
2 Installation and Network Configuration	7
2.1 Hardware Installation.....	7
2.2 Network Connection	11
3 Accessing device	12
3.1 Using WEB Browser	12
3.2 Using RTSP Media Player	13
3.3 Using Mobile Devices	15
3.4 Using Video Surveillance Software	17

1 Overview

1.1 Product Description

The ZKMD4 series mini IP cameras are specially designed for indoor application, which feature ultraminiature, fashionable and simple appearance.

The sophisticated software and hardware design guarantees implementation of functions and enhancement of stability, while the powerful hardware platform and optimized H.264 coding algorithm guarantee the transmission of sharp and smooth video effect. In addition, the built-in TF card, mobile frame detection, alarm linkage and automatic EMAIL sending make the surveillance system to be more secure and smart. The embedded Web server enables users to directly access the camera via browser.

The series products can be easily installed and operated. In particular, the products are applicable for the places requiring short distance and wide angle, such as residence communities and stores, as well as the occasions requiring remote network video.

1.2 Product Features

- Hi3507 high-performance multimedia processor, supporting H.264 Main Profile video coding
- Dual code stream, suitable for various networks
- Support all kinds of protocols, such as, TCP/IP, HTTP, TCP, UDP, ARP, SMTP, FTP, DHCP, DNS, DDNS, NTP and UPNP, etc.
- Aluminium alloy die casting design, and best dustproof and anti-corrosion effect
- Double-glass front cover for better optical isolation and mist prevention surface for better night viewing

- Three-layer shield +magnetic ring design to eliminate signal interference
- Added functions, such as voice capture, TF card memory and reset, etc.
- Support Ethernet power supply (PoE 802.3af regulation) (optional)
- Double web indicator lamps for easy judgment of web status
- 3.6mm megapixel high definition lens
- Self-recovery from abnormality and auto reconnection after network interruption
- Automatically capture images during an alarm and send them to the designated email
- Support motion detection and external detector alarm
- Allow setting several alarm times and support the remote alarm linkage
- Support dynamic IP (DHCP) and dynamic domain name system (DDNS)
- Network time synchronization (NTP)
- HD cam to support the browsing by 14 users simultaneously, 4 in primary code stream and 10 in secondary code stream

1.3 Technical Parameters

Product Name	Mini Dome IP Camera		
Product Model	ZKMD470	ZKMD450	ZKMD410
Cam Properties			
Image Sensor	1/3" megapixel progressive CMOS sensor	1/4" megapixel progressive CMOS sensor	1/4" megapixel progressive CMOS sensor
Image Resolution	WDR HD 1280×720	HD 1280×720	Economic HD 1280×720
Lens	3.6mm fixed lens		


Overview

Video Coding	
Primary Processor	Hi3507
Operating System	Embedded Linux
Video Compression Algorithm	H.264 main profile level 3
Audio Compression Algorithm	G.726/G.711
Video Compression Code Rate	Primary Code Stream: 1024~6114 Kbits/s adjustable Secondary Code Stream: 32~512 Kbits/s adjustable
Video Resolution	Primary Code Stream: 1280x720 Secondary Code Stream: 320x240
Video Frame Rate	1~25 frames optional
Video Parameters	WDR HD: Brightness, Saturation, Contrast, Illumination, Sensitivity, Shutter, Image Up/Down, Image Left/Right, Night Vision Mode and Wide Dynamic Mode adjustable HD: Brightness, Saturation, Contrast, Image Up/Down, Image Left/Right and Night Vision Mode adjustable Economic HD: Brightness, Saturation, Contrast, Illumination, Image Up/Down, Image Left/Right and Night Vision Mode adjustable
Functional Interfaces	
Motion Detection	Allow 4 independent detection areas
Memory	Support TF card for video storage and image capture, 32G maximum (optional)
Network Interface	10Base-T/100Base-TX Ethernet interface
Supported Network Protocols	TCP/IP, HTTP, TCP, ICMP, UDP, ARP, IGMP, SMTP, FTP, DHCP, DNS, DDNS, NTP, UPNP and RTSP, etc.
Working Environment	
Input Power	DC 12V, $\geq 1A$
	POE Ethernet power supply: comply with 802.3af regulation (optional)


Maximum Power Consumption	7W
Working Temperature	-20~+55 °C
Working Humidity	10%~95%RH
Installation Mode	Wall-mounted / Ceiling mounted

1.4 Product Appearance

- Stereoscopic Drawing

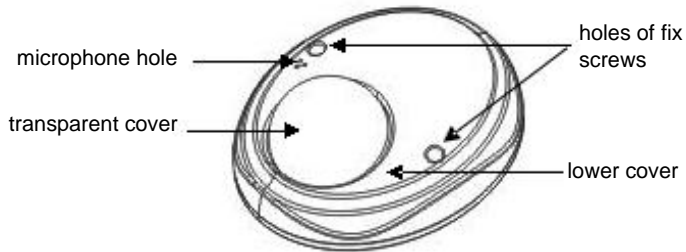

- Dimensional Drawing (in mm)




Top View



Right View

1.5 Connecting Terminal

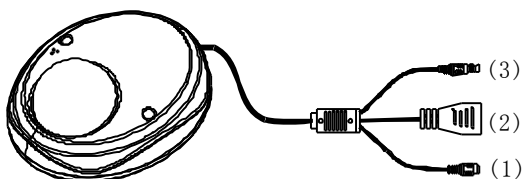

1. **Power Interface:** Connect to the adapter. This IPC employs the power supply of DC 12V and no lower than 1A. Do not use any different power supply as it may damage the camera.
2. **Network Interface:** 10/100M self-adapting Ethernet interface is used to connect the camera with various network equipments, such as, switch, router and hub. When it is connected to 10M network, the orange lamp is also on. When it is connected to 100M network, the green lamp is always on.

This interface can also employ Ethernet power supply (POE, optional) and allow the transmission of power and data through Ethernet cable.



3. **Reset Button:** When the camera fails to function during incorrect operation or accidental failure (e.g. forget IP address or password), or it is used in different scenes, press down the button for above 5s after a delay of 30s from powering on to restore the camera to its factory default. The default user's name is "admin", the default password is "admin" and the default IP address is "192.168.1.88".

1.6 Basic Procedure


- (1) Unpack and check whether any component is missing;
- (2) Connect the camera to computer by means of patch cable;
- (3) If your computer IP is in a network section different from camera IP, please set it to the same network section as camera IP, such as, 192.168.1.87.
- (4) Log in the camera through client software or browser to check whether the video functions normally;
- (5) Adjust the code stream and other video parameters;
- (6) Modify the network parameters of camera and reboot the device;
- (7) Repeat Step 3;
- (8) Revisit the camera through client software or browser to check till the video functions normally;
- (9) Install the camera and adjust the camera angle to the appropriate area;
- (10) Visit the camera through client software or browse for video monitoring.

2 Installation and Network Configuration


2.1 Hardware Installation

- Installation Notices:


1. Read through the guide for installation prior to installation.
2. Check whether any component is missing against the packing list, if yes, please contact your supplier.
3. Wire during power off. If the camera does not function normally during operation, please cut off the power before check.

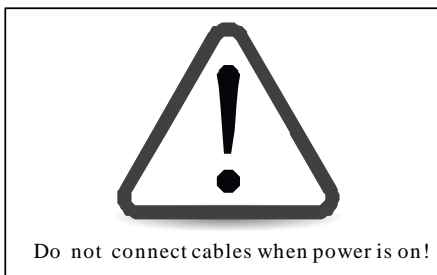

Note: The wiring during power on may seriously damage the camera, which will be disqualified from the guarantee.

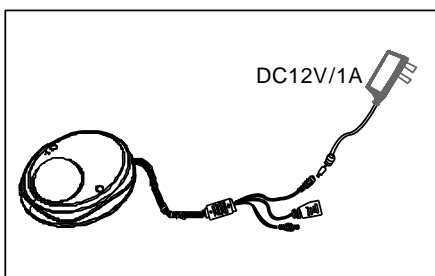


4. Use the power supply of DC12V and no lower than 1A for the camera or PoE power supply (optional). Too high or low voltage, or AC power supply may cause the abnormal operation of the camera.
5. Use the standard power cord when the power supply is too far away from the camera, and consider the voltage drop caused by long distance.
6. Read through the instructions for connecting terminal and wire strictly according to interfaces. Any damage to the camera due to improper operation will be disqualified from the guarantee.
7. Mount the relay equipment in the middle to avoid signal attenuation when the straight communication distance from the camera to the incoming equipment exceeds 80m.

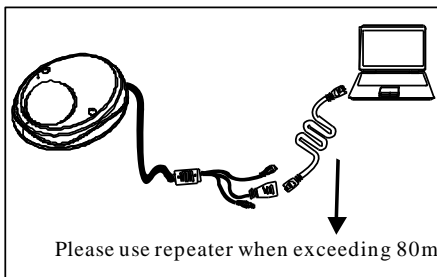

8. Use the camera in the working conditions:


Ambient temperature: $-20\text{ }^{\circ}\text{C} \sim +55\text{ }^{\circ}\text{C}$; ambient relative humidity: 10% ~ 95%RH.

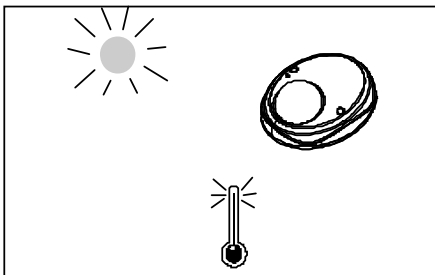

9. Keep the cleanness of double glasses in front of lens. If too dirty, clean them with soft fabric.

- Schematic Diagrams of Installation


1. Press the installation template against the wall and make holes as marked on the template (including screw holes and lead wire hole). (in mm)

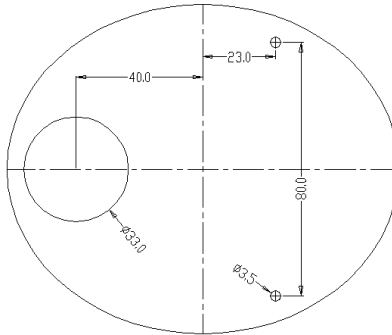


2. Use screwdriver to take off 2 fixed screws and put the lower cover off.



3. Fix the camera body by 2 screws first.



4. Adjust the lens angle to suitable surveillance area till image can be seen clearly.



5. Install the under-cover and fix it by 2 screws.



2.2 Network Connection

The device can be connected to network in two ways. The first way is to connect to the network by means of Ethernet cable, and the second way is to connect to wireless network (optional).

● Connect by Ethernet Cable

1. Use Ethernet cables to connect the device to network or directly to computer.
2. Connect the power supply of the device.
3. During normal connection, if it is a 10M network, the orange lamp is always on; if it is a 100M network, the green lamp is also on. The physical connection with network is completed after the lamp shining.
4. In the “Start” menu, select “Programs” -- “Accessories” -- “Command Prompt”, and input the ping command to the device address (e.g.: type in “ping 192.168.1.88”). If “Request timed out” does not pop up, the device is successfully connected to network.



Notice: 1) The default IP address is “**192.168.1.88**” and the default HTTP port is 80. If needed to change IP address or port, refer to Network Setting in *WEB Server User Manual*.

2) If the device is in a network section different from computer, refer to How to Visit IPC on Internet in *WEB Server User Manual* for the connection during different network sections.

● Connect to Wireless Network


Before starting the wireless network, connect the IPC to network by Ethernet cable, visit the device through browser, enter “Network Setting” interface, and set the wireless network connection following the operating procedure, as detailed in Network Setting in *WEB Server User Manual*.

3 Accessing device


There are 4 methods can be used to access the device: WEB Browser, RTSP Media Player, Mobile Device and Video Surveillance Software (ZKiVision client software).

3.1 Using WEB Browser


1. Open a browser, type in the dynamic domain name or IP address of the device (e.g. <http://192.168.80.123>), press "OK" to open the following login interface:

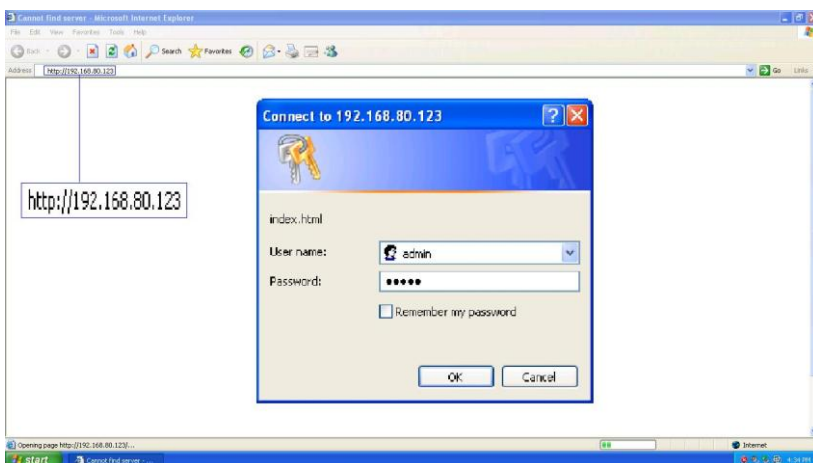

2. Type in user's name and password, and click "OK" and the guide page will show as below:

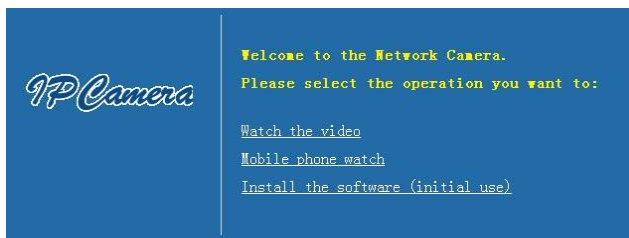

3. Click **Watch the video** to enter **Preview** interface:

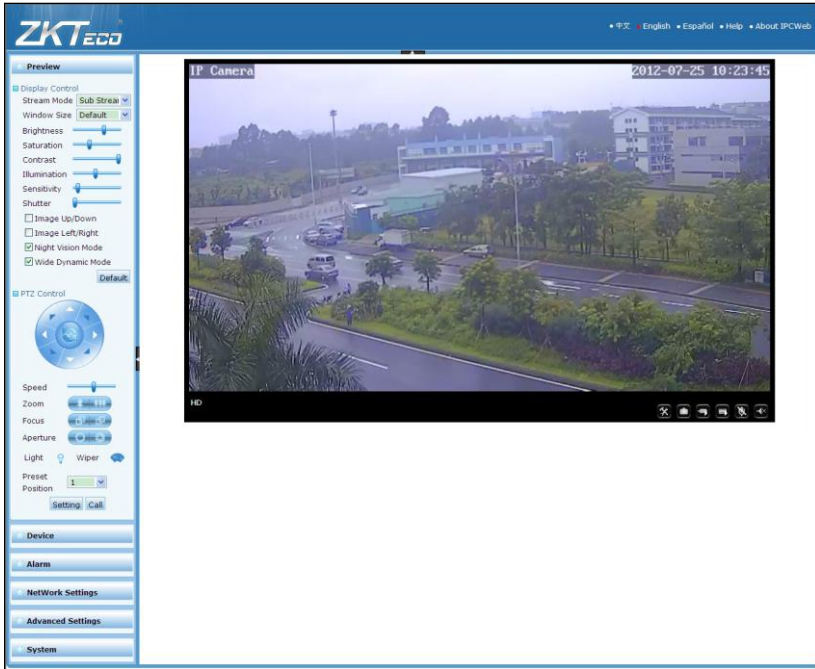

Note: When accessing the device via browser for the first time, it is necessary to download the control. More details about how to use browser for video surveillance, please refer to *WEB Server User Manual* in the supplied CD.

3.2 Using RTSP Media Player


1. Download and install a media player supporting RTSP protocol, e.g. **VLC media player**.
2. Open the media player, select the menu “Media”—“Open Network Stream”, pop up the input interface of URL.



3. Type in the network URL in the form of `rtsp://<IP address>:<RTSP port>/<stream code>`.



4. Click "Play" and the media player will play the real-time video of the device.

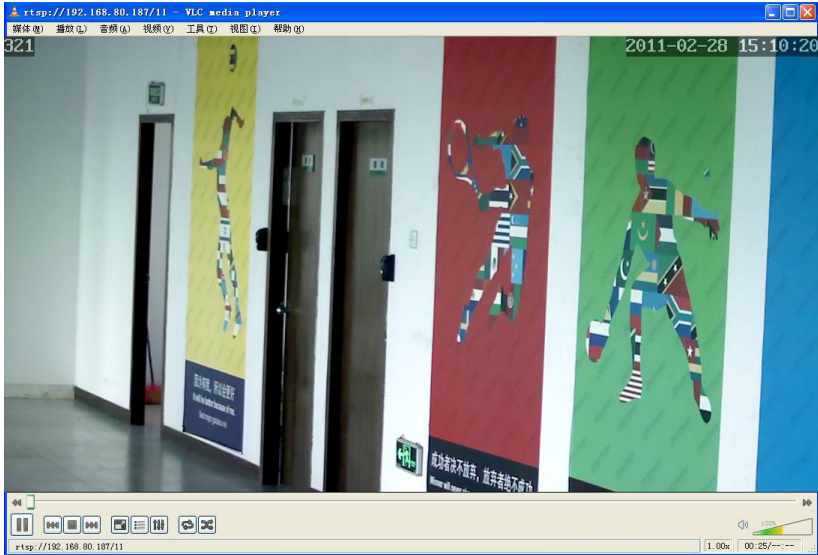


Note: 1) The default RTSP port of device is 554. If it must be modified, please refer to *WEB Server User Manual* in the supplied CD.

2) If it is necessary to learn about how to use RTSP media player for video surveillance, please refer to *WEB Server User Manual* in the supplied CD.



3.3 Using Mobile Devices

If it is necessary to use mobile phone for video surveillance, please firstly ensure the device can be accessed on Internet. Please refer to *ZK iVision User Manual (Mobile Version)*.


1. Install the surveillance software into your mobile phone.
2. Click the icon “ZK iVision” to enter the software.

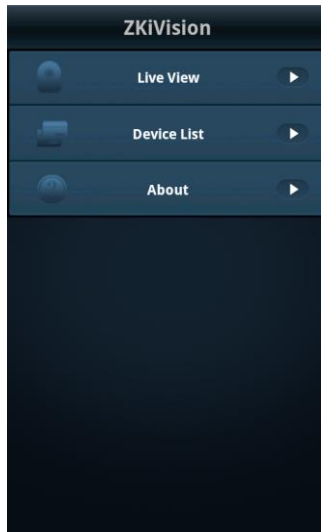

3. Choose “Device List” and click “Add” to add devices, type in the user name, password, domain name and port of the device, click “Save” to complete it.

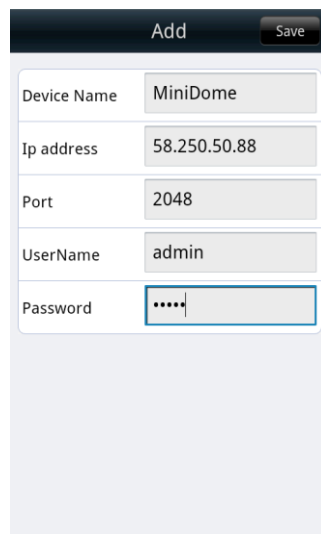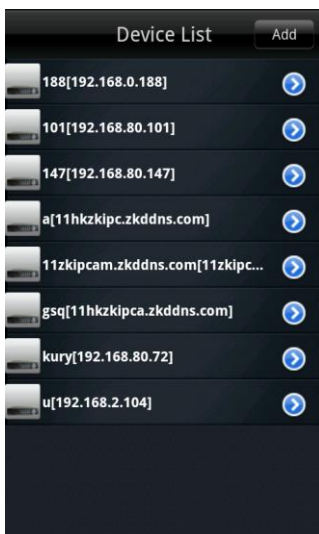

4. Choose “Live View” on the initial interface, click the cell and click again to select the device to play its live video.

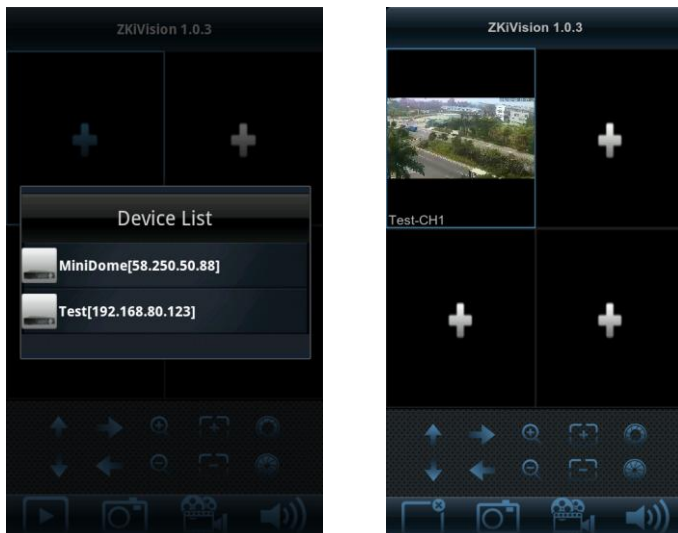

Note: 1) The operating system of mobile device must be **Android** or **iOS** or **BlackBerry**.

2) As the internet service is required for watching video, please consult with your internet service provider for specific charges.

3) Please refer to *ZKiVision User Manual (Mobile Version)* in the supplied CD for more details.

3.4 Using Video Surveillance Software

ZKiVision Client Software is our company's free video surveillance software, which can help manage and monitor multiple devices in a real-time manner. Install the software in the supplied CD, and add devices to the software. Then the real-time

monitoring can be started. If needed to learn about how to use the video surveillance software, refer to *ZKiVision Client Software User Manual* in the CD.

